


SRFire P10 Firefighting Pump

Designed using the latest CAD technology, the SRFire P10 is a lightweight, high-performance portable pump for utility firefighting. It is ideally suited to vehicle mounting or installation on a slip-on unit or trailer with a small tank. The P10 delivers pressures up to 1,200 kPa and flow rates of more than 950 L/min.

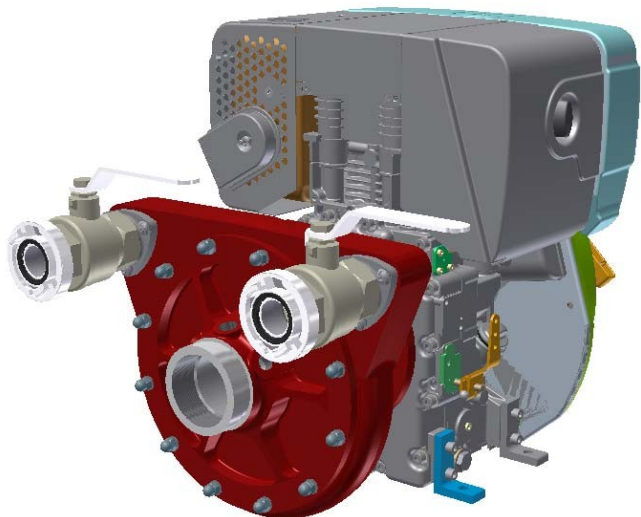

FEATURES

- Latest CAD-designed waterways
- Dual 38 mm discharge outlet
- Bronze impeller
- Hydraulically balanced design
- Carbon/ceramic stainless steel mechanical seal
- Replaceable bronze wear rings
- Four-position discharge outlets
- Lightweight, heat-treated aluminium alloy body
- Integrated delivery manifold
- Direct close-coupled engine connection

PUMP SPECIFICATIONS

Pump:	Single-stage centrifugal
Suction:	65 mm BSP female / Victaulic
Priming port:	1/2 in BSP
Auxiliary ports:	Optional 3/8 in BSP
Discharge:	2 x 38 mm BSP male standard
Optional discharge:	2 x 25 mm BSP male
Maximum pressure:	Up to 1,200 kPa
Flow rate:	Over 950 L/min
Hydrostatic test:	Twice operating pressure
Pump / engine mass:	60 kg (indicative)[1]

MOUNTING OPTIONS

- Tubular wraparound roll frame
- Aluminium channel mounting frame

INSTRUMENTS & CONTROLS

Remote or fixed instrument panel available with:

- Compound gauge
- Pressure gauge
- Tachometer
- Engine start button
- Oil-pressure warning/gauge
- Temperature warning/gauge
- Vernier throttle
- Stop control
- Engine hour meter