

Municipal Electric Monitors

FireFox Multi-Purpose Monitor 500 GPM (1900 LPM)

The FireFox Electric Monitor from Akron® is a technologically advanced remote controlled monitor with flows up to 500 gpm (1900 lpm). The FireFox Monitor is designed to meet various water, foam, CAFS, and dry chemical needs. This versatile monitor can be used for wildland firefighting, mini pumpers, crash truck turrets, deicing, fixed site facilities, arena protection and many other unique applications.

3463 FireFox Electric Monitor

- 320° horizontal travel with adjustable stops at +/- 90°
- 135° vertical travel (+90° to -45°) with adjustable stops at +45° and -20°

Monitor Options: (Must specify)

- Automatic Oscillation & Stow
- Remote 2" or 2 1/2" Electric Valve
- 12 or 24 volt (24 volt CE version available - Must Specify)
- 2" Quick disconnect
- Position feedback

Nozzle Options:

- See page 193 for Monitor/Fog Nozzle Compatibility Chart
- Adjustable or Single Fixed Flow Baffle up to 500 gpm (1900 lpm)
- Dry Chemical Nozzle - Optional
- Foam Tubes - Optional (See page 31)
- Smooth bore tip with mini shaper

NOTE: All FireFox Fog Nozzles are available with optional flat dispersed pattern




Adjustable Flows Available
See page 35 for nozzle specs

Low Flow	GPM	30	60	95	125
	LPM	115	230	360	475
Medium Flow	GPM	125	175	250	350
	LPM	475	660	950	1325
High Flow	GPM	350	400	450	500
	LPM	1325	1525	1700	1900



2" Quick-Disconnect,
Ideal for Cab
Forward Trucks

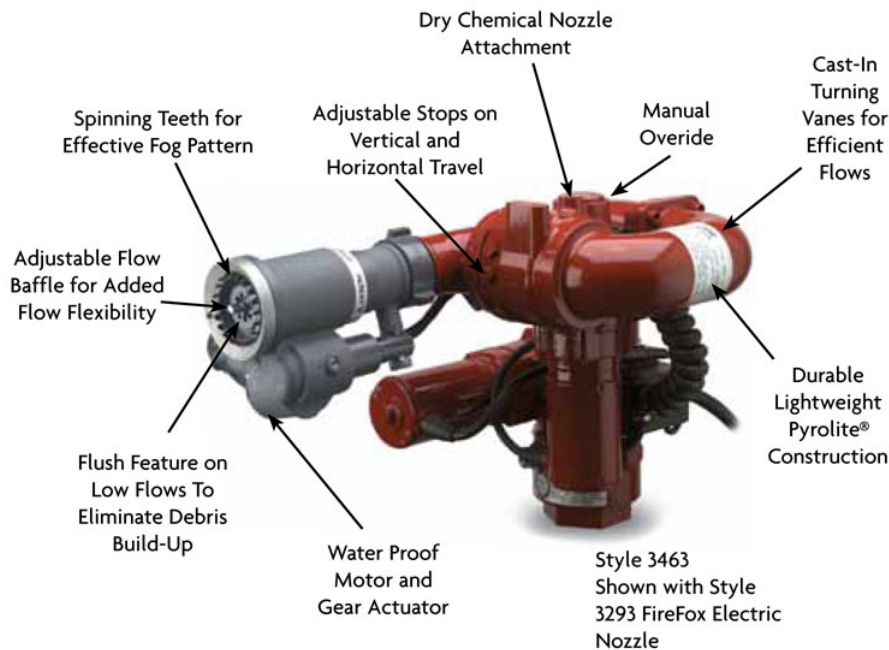

FireFox available with position feedback for Position Indicator option



Wireless Remote Control Available

See Page 45 for Electric Monitor Accessories

Style	Weight lbs. (kg)	In Stowed Position			Inlet	Outlet	Flow	
		Height	Width	Depth			GPM	LPM
3463	25 (11.3 kg)*	11 3/4" (298 mm)	11" (279 mm)	11 1/2" (292 mm)	2" or 2 1/2" NPT (50 or 65 mm) 1 1/2" or 3" FL (38 or 75 mm)	1 1/2" or 2 1/2" NH (38 or 65 mm)	500	1900

* Less nozzle

"Quality and Innovative Fire and Rescue Equipment"



www.bigredtruck.com.au
07 3287 5504

