
STYLE 4470 AKROFOAM™ MASTER STREAM NOZZLE W/ QUICK CONNECT & METERING DIAL





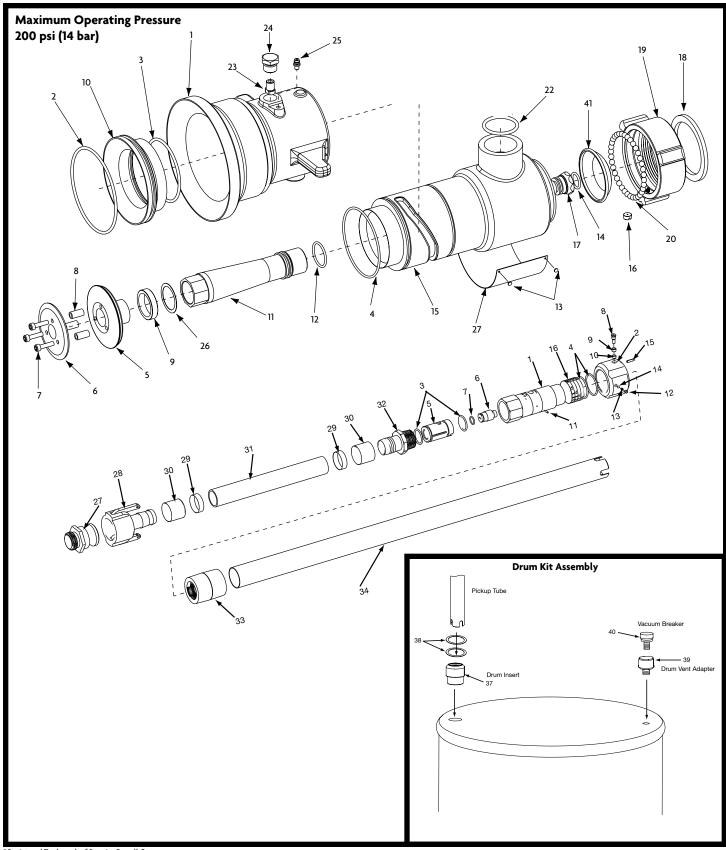

STYLE 4470 AKROFOAM™ MASTER STREAM NOZZLE W/QUICK CONNECT & METERING DIAL TECHNICAL SERVICE PARTS LIST

NOZZLE

ITEM NO.	DESCRIPTION	PART NUMBER	QUANTITY
1	Pattern Sleeve	119398	1
2	O-Ring	757251	1
3	O-Ring	757065	1
4	O-Ring	757149	1
5	Baffle	119400	1
6	Deflector	745145	1
7	Socket Head Cap Screw	767041	3
8	Deflector Spacers	770303	3
9	Spacer-500 gpm/1900 lpm	119405	1
9	Spacer-750 gpm/2900 lpm	119406	1
9	Spacer-1000 gpm/3800 lpm	119407	1
10	Throat	119397	1
11	Foam Stem	119401	1
12	O-Ring	757092	1
13	Nail Grips	736045	4
14	O-Ring	757002	1
15	Nozzle Body	119396	1
16	Plug	742023	1
17	Blending Tube	772194	1
18	Gasket	717043	1
19	Swivel-2 1/2" NH *	101325	1
20	Ball Bearings	**	39
22	O-Ring	757227	1
23	Cam Follower	707435	1
24	Cam Nut	735061	1
25	Grease Fitting	713191	1
26	Shims	‡	
27	Identification Plate	742170	1
37	Drum Insert¶	723028	1
38	O-ring¶	757270	2
39	Adapter¶	704760	1
40	Vacuum Breaker¶	704747	1
41	Optional Screen	769027	1

*For other threads order by description and thread size (ODM and TPI or by

Akron Thread Code.

PICKUP ASSEMBLY

ITEM NO.	DESCRIPTION	PART NUMBER	QUANTITY
1	Body	704783	1
2	Sleeve	769734	1
3	O-Ring	757011	2
4	O-Ring	757375	2
5	Spool Seat	769731	1
6	Spool	769733	1
7	O-Ring	757002	1
8	Cam Axle	702050	1
9	Cam Roller - Long	707491	1
10	Cam Roller - Short	707239	1
11	Кеу	727033	1
12	Socket Head Set Screw	765083	1
14	Detent Ball	704018	1
15	Groove Pin	741058	1
16	Gallonage Control Band	703613	1
27	Cam Lock Connector	120682	1
28	Cam Lock Assembly	707489	1
29	Hose Clamp	707166#	2
30	Plastic Ferrule	109028	2
31	Pickup Hose - 10'	721242	1
32	Hose Connector	707159	1
33	Adapter	707268	1
34	Pickup Tube	772118	1

Installation Instructions for Drum Kit Assembly

- 1. Remove the 2" plug from the 55 gallon drum
- 2. Thread the Drum Insert and tighten

NOTE: Insert the O-Rings in the ID of the Drum Insert to provide a seal once the Pickup Tube is inserted.

- 3. Insert the AkroFoam Pickup tube through Drum Insert
- 4. Remove 3/4" plug from the 55 gallon drum
- 5. Insert the Drum Vent Assembly into the ³/₄" opening



PHONE: 330.264.5678 or 800.228.1161 | FAX: 330.264.2944 or 800.531.7335 | www.akronbrass.com

WARRANTY AND DISCLAIMER: We warrant Akron Brass products for a period of five (5) years after purchase against defects in materials or workmanship. Akron Brass will repair or replace product which fails to satisfy this warranty. Repair or replacement shall be at the discretion of Akron Brass. Products must be promptly returned to Akron Brass for warranty service.

We will not be responsible for: wear and tear; any improper installation, use, maintenance or storage; negligence of the owner or user; repair or modification after delivery; damage; failure to follow our instructions or recommendations; or anything else beyond our control. WE MAKE NO WARRANTIES, EXPRESS OR IMPLED, OTHER THAN THOSE INCLUDED IN THIS WARRANTY STATEMENT, AND WE DISCLAIM ANY IMPLED WARRANTY OR HENDES FOR ANY PARTICULAR PURPOSE Further, we will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profits) from any cause whatsoever. No person has authority to change this warranty.

^{**} Packet of 50 ball bearings - P/N 109041

[¶] Included in Drum Kit Assembly P.N 4470-0009

[‡] Colored shims may be added in assembly. When repairing, return all shims to their original positions

[#] Special tool required to assemble