



Apparatus Flow Test Kit

FK-25

- Apparatus flow test kits include your choice of four (4) out of the nine (9) tips offered. Tips range from $\frac{3}{4}$ " to $2\frac{1}{2}$ " in $\frac{1}{8}$ " increments
- Standard with $1\frac{1}{2}$ ", $1\frac{3}{4}$ ", 2", $2\frac{1}{4}$ " tips ($\frac{3}{4}$ ", 1", $1\frac{1}{8}$ ", $1\frac{1}{4}$ ", $2\frac{1}{2}$ " tips optional) - Must specify
- $3\frac{1}{2}$ " liquid filled 0-160 psi (0-1100 kPa) gauge
- Large, heavy duty carrying case (FK-230), $18\frac{3}{8}$ " W x $14\frac{1}{4}$ " D x 8" H
- $2\frac{1}{2}$ " female swivel
- Certified calibrated gauges
- Large diameter flow test tips available



FK-25




Apparatus Test Gauge Kit

TGK-2

- 36" test hoses, connect directly to underwriters test fittings (Style 44)
- $\pm 1\%$ accurate, $3\frac{1}{2}$ " diameter, freeze protected liquid filled gauges
- 0-30", .5Hg increment vacuum and 0-300, 5 psi (34 kPa) increment pressure gauges
- Heavy-duty carrying case
- Certified calibrated gauges

TGK-3

- Same as TGK-2 with a space for an extra gauge to be mounted (Requires RG-230 remote assembly)

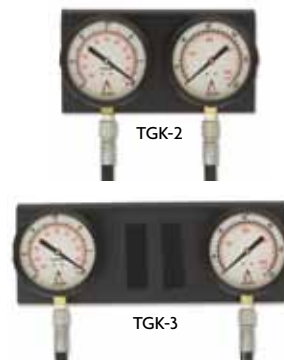

TGK-2

TGK-3

Pressure/Vacuum Panel Adapter

44

Pressure/Vacuum Panel Adapter

- Complete fitting for pump panel
- Simplifies attachment of gauges for pump tests
- Remove hex plugs and screw in gauges
- Length: $3\frac{1}{2}$ ", height: $1\frac{3}{8}$ ", weight: 8 oz.



Style 44

Line Gauges

- Designed to determine nozzle pressure and static pressure
- $3\frac{1}{2}$ " freeze protected liquid filled 0-160 psi (0-1100 kPa)

35

Line Gauge

- Ideal for use in high-rise packs
- Available in $2\frac{1}{2}$ " and 3" sizes
- $1\frac{1}{2}$ " diameter peanut gauge (0-300) with guard
- Grade B 3%-2%-3% accuracy
- $2\frac{1}{2}$ " weight: 2 lbs., length: 5"
- 3" weight: $2\frac{1}{2}$ lbs., length: $5\frac{1}{2}$ "
- Certified calibrated gauges
- Pyrolite® construction

Style	Description	
LG-15	$1\frac{1}{2}$ " (38 mm)	Line Gauge
LG-25	$2\frac{1}{2}$ " (65 mm)	Line Gauge
LG-30	3" (75 mm)	Line Gauge
LG-35	$3\frac{1}{2}$ " (89 mm)	Line Gauge
LG-40	4" (100 mm)	Line Gauge
LG-45	$4\frac{1}{2}$ " (114 mm)	Line Gauge
LG-50	5" (125 mm)	Line Gauge
LG-60	6" (150 mm)	Line Gauge



LG-25



Style 35

Cap Gauge

- Certified calibrated gauges
- Designed for determining the static pressure of water in fire hydrants, fire hoses, and/or fire pumps
- $3\frac{1}{2}$ " liquid filled 0-160 psi (0-1100 kPa) gauge, 2 psi (20 kPa) increments, $\pm 1\%$ accurate full scale
- Pyrolite construction

Style	Description
CG-15	$1\frac{1}{2}$ " (38 mm) NH Cap Gauge
CG-25	$2\frac{1}{2}$ " (65 mm) NH Cap Gauge
CG-30	3" (75 mm) NH Cap Gauge
CG-35	$3\frac{1}{2}$ " (89 mm) NH Cap Gauge
CG-40	4" (100 mm) NH Cap Gauge
CG-40S	4" (100 mm) Storz Cap Gauge

Style	Description
CG-45	$4\frac{1}{2}$ " (114 mm) NH Cap Gauge
CG-50	5" (125 mm) NH Cap Gauge
CG-50S	5" (125 mm) Storz Cap Gauge
CG-60	6" (150 mm) NH Cap Gauge
CG-60S	6" (150 mm) Storz Cap Gauge



CG-25