

BRT FIRE & RESCUE SUPPLIES

INTRANT™ INTRINSICALLY-SAFE
DUAL-LIGHT™ ANGLE LIGHT

NIGHTSTICK®
Life Depends on Light™

Quality and Innovative Fire Rescue Equipment



Head rotates 90° – directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches **independently control** separate LEDs



Heavy-duty, clip and V-ring **securely holds tight to gear** in any situation



AVAILABLE IN MULTIPLE COLORS.



FL 1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	401m	250m	187m
	40256cd	15625cd	8750cd
	2m	1m	1m

200 LUMENS

BIG RED TRUCK

"Quality and Innovative Fire and Rescue Equipment"

www.bigredtruck.com.au
asktheteam@bigredtruck.com.au
Phone: +61 (0)7 3287 5505

**PRODUCT NUMBER**

BAY1.EX.XPP5566RX - INTRANT™ Intrinsically Safe Dual-Light™ Angle Light (Red)
BAY1.EX.XPP5566GX - INTRANT™ Intrinsically Safe Dual-Light™ Angle Light (Green)

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

CE, CULus, Atex, IECEx, NFPA

CASE MATERIAL

Glass filled nylon polymer

LUMENS/RUNTIME**FLASHLIGHT**

- 200 Lumen, High Mode - 11 hours runtime
- 110 Lumen, Medium Mode - 18 hours runtime
- 60 Lumen, Low Mode - 33 hours runtime
- Strobe

FLOODLIGHT

- 100 Lumen, High Mode - 11 hours runtime
- 400 Lumen, Medium Mode - 18 hours runtime
- 20 Lumen, Low Mode - 33 hours runtime

DUAL-LIGHT

- 205 Lumen, 11 hours runtime

CANDELA**FLASHLIGHT**

- HIGH: 40,256
- MEDIUM: 15,625
- LOW: 8,750

BEAM DISTANCE**FLASHLIGHT**

- HIGH: 401m
- MEDIUM: 250m
- LOW: 187m

WATER RATING

- IP-67 (Dustproof & Waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 168mm
- WIDTH: 66mm
- DEPTH: 66mm
- BEZEL DIAMETER: 53mm
- WEIGHT: 315g (with batteries)

BATTERY

- 3AA batteries (included)


WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

- Angle light
- AA battery carrier
- Instruction manual

FL 1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	401m	250m	187m
	40256cd	15625cd	8750cd

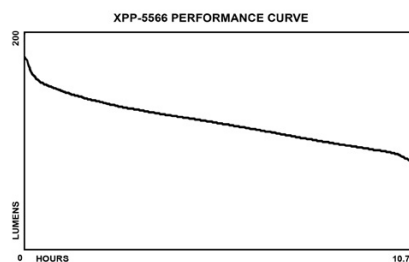

Bayco Products, Inc. XPP-5566
640 S. Sanden Blvd., Wylie, TX 75098

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

For use with Bayco Li-ion Battery Pack 5568-BATT or
5566-CARRIER with 3 AA Energizer Type EN91 or E91
batteries only



E 114304
ID 4003544

ELECTRICAL SAFETY
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CE 0359

Control Drawing: 5568-CERT-DWG1-03

CLASS I DIV 1 GRPS A-D T3
CLASS II & III DIV1 GRPS E-G T135°C
CLASS I ZONE 0 AEx ia IIC T3 Ga
● I M1 Ex ia op is I Ma
● II 1 G Ex ia op is IIC T3 Ga

Ex ia op is I Ma
Ex ia op is IIC T3 Ga
DEMKO 17 ATEX 1927
IECEx UL 17.0082
-20°C ≤ Tamb ≤ +40°C
1.5V/Cell Alkaline
3.7V/Cell Li-ion
IP-67
Um: 10V

CERTIFIED

AVAILABLE IN MULTIPLE COLORS.