



BRT FIRE & RESCUE SUPPLIES

INTRANT™ INTRINSICALLY-SAFE
DUAL-LIGHT™ ANGLE LIGHT

NIGHTSTICK®
Life Depends on Light™



HEAD ROTATES 90°

EXCLUSIVE
45°
DOWNWARD FLOODLIGHT

GRAB-N-GO
CHARGING BASE




Head rotates 90° – directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area



Easy-to-use with gloves, the large switches **independently control** separate LEDs



Heavy-duty, clip and V-ring **securely holds tight to gear** in any situation



AVAILABLE IN MULTIPLE COLORS.



FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	401m	250m	187m
	40256cd	15625cd	8750cd

200 LUMENS

BIG RED TRUCK

"Quality and Innovative Fire and Rescue Equipment"

www.bigredtruck.com.au
asktheteam@bigredtruck.com.au
Phone: +61 (0)7 3287 5505

Quality and Innovative Fire Rescue Equipment

**PRODUCT NUMBER**

BAY1.EX.XPR5568RX - INTRANT™ Rechargeable Intrinsically Safe Dual-Light™ Angle Light (Red)
BAY1.EX.XPR5568GX - INTRANT™ Rechargeable Intrinsically Safe Dual-Light™ Angle Light (Green)

MARKET APPLICATIONS

Hazardous work environments, fire, rescue, industrial and automotive

CERTIFICATIONS

CE, CULus, Atex, IECEx, NFPA

CASE MATERIAL

Glass filled nylon polymer

LUMENS/RUNTIME**FLASHLIGHT**

- 200 Lumen, High Mode - 7 hours runtime
- 110 Lumen, Medium Mode - 15 hours runtime
- 60 Lumen, Low Mode - 27 hours runtime
- Strobe

FLOODLIGHT

- 100 Lumen, High Mode - 7 hours runtime
- 400 Lumen, Medium Mode - 15 hours runtime
- 20 Lumen, Low Mode - 27 hours runtime

DUAL-LIGHT

- 205 Lumen, 7 hours runtime

CANDELA**FLASHLIGHT**

- HIGH: 40,256
- MEDIUM: 15,625
- LOW: 8,750

BEAM DISTANCE**FLASHLIGHT**

- HIGH: 401m
- MEDIUM: 250m
- LOW: 187m

WATER RATING

- IP-67 (Dustproof & Waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 168mm
- WIDTH: 66mm
- DEPTH: 66mm
- BEZEL DIAMETER: 53mm
- WEIGHT: 301g (with batteries)

BATTERY

- Rechargeable Li-ion battery pack
- AA Battery carrier (batteries not included)


WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

- Angle light
- Rechargeable Li-ion battery pack
- AA battery carrier
- Snap-in rapid charger
- AC & DC power supplies
- Instruction manual

FL 1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	7h	15h	27h
	401m	250m	187m
	40256cd	15625cd	8750cd
2m			
1m			

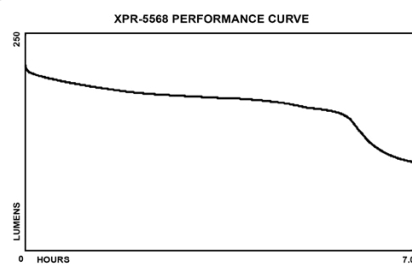

Bayco Products, Inc. XPR-5568
640 S. Sanden Blvd., Wylie, TX 75098

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS
For use with Bayco Li-ion Battery Pack 5568-BATT or
5566-CARRIER with 3 AA Energizer Type EN91 or E91
batteries only

LISTED
E 114304
ID 4003544
ELECTRICAL SAFETY
INTRINSICALLY SAFE
SECURITE INTRINSEQUE
CE 0359
Control Drawing: 5568-CERT-DWG1-03

CLASS I DIV 1 GRPS A-D T3
CLASS II & III DIV1 GRPS E-G T135°C
CLASS I ZONE 0 AEx ia IIC T3 Ga
Ⓜ I M1 Ex ia op is I Ma
Ⓜ II 1 G Ex ia op is IIC T3 Ga
Ex ia op is I Ma
Ex ia op is IIC T3 Ga
DENKO 17 ATEX 1927
IECEx UL 17.0082
-20°C ≤ Tamb ≤ +40°C
1.5V/Cell Alkaline
3.7V/Cell Li-ion
IP-67
Um: 10V



AVAILABLE IN MULTIPLE COLORS.