

SELECTABLE FLOW NOZZLE

Multi Flow Compact

EN1518-2 certified selectable flow nozzle

As part of our policy of constant research to improve our products, we reserve the right to modify our products characteristics at any time without notice.

Body in Hard anodized Aluminum

6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction

Adjustment of the full jet to the optimal spray angle in a quarter turn

Stainles steel slide valve for keeping perfect stream quality

Powerful full cone spray for smothering flames.


Unbreakable teeth No Maintenance

Polyurethane Bumper resistant to high temperatures, hydrocarbons and aggressive chemicals

Strainer to prevent large debris and ingress.



Leader Nozzles are available in 3 Different sizes:




Quality and Innovative Fire Rescue Equipment



"Quality and Innovative Fire and Rescue Equipment"

www.bigredtruck.com.au
asktheteam@bigredtruck.com.au
Phone: +61 (0)7 3287 5505



Characteristics



Models	Réf.	Weights	Flow rates	Pressures	Inlets
MultiFlow 150	NMA-002-LI	1" BSP F: 1.75kg / 3.85 lbs	20 - 40 - 100 – 150 l/min	6 bar	1" BSP F
MultiFlow 250	NMA-003-LI		40 - 100 - 150 – 235 l/min		
MultiFlow 150	NMA-001-EI	2" BSP M: 1.85kg / 4.1 lbs	20 - 40 - 100 – 150 l/min		2" BSP M
MultiFlow 400	NMA-004-EI		70 - 130 - 230 – 400 l/min		
MultiFlow 40 G	NMA-006-1I	1.75kg / 3.85 lbs	5 – 10 – 24 - 40 GPM	100 PSI	1" NH F
MultiFlow 125G	NMA-005-RI		30 – 60 – 95 - 125 GPM		1.5" NH F

Dimensions

For 1" inlet versions: L. 29 x l. 12 x h. 23cm / L. 11.4" x l. 4.7" x h. 9"

For 2" inlet version: L. 31.5 x l. 12 x h. 23cm / L. 12.4" x l. 4.7" x h. 9"

Curve: Flow vs Pressure

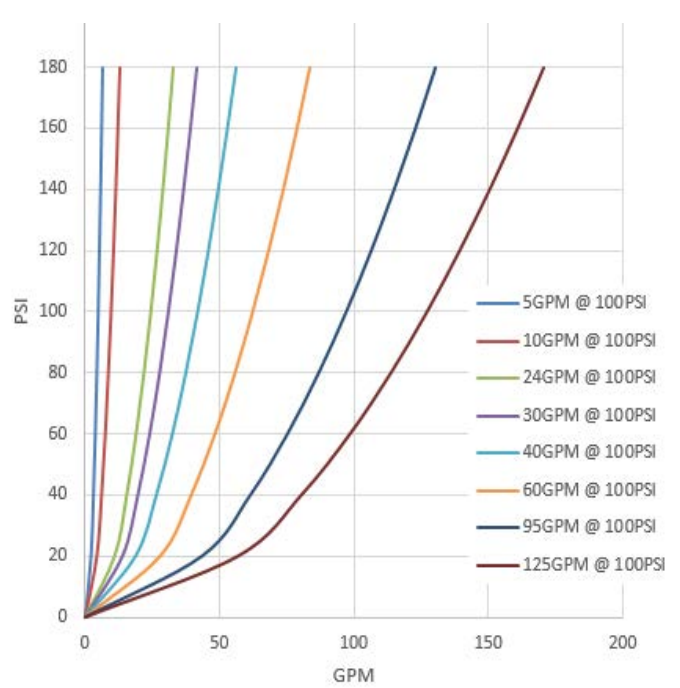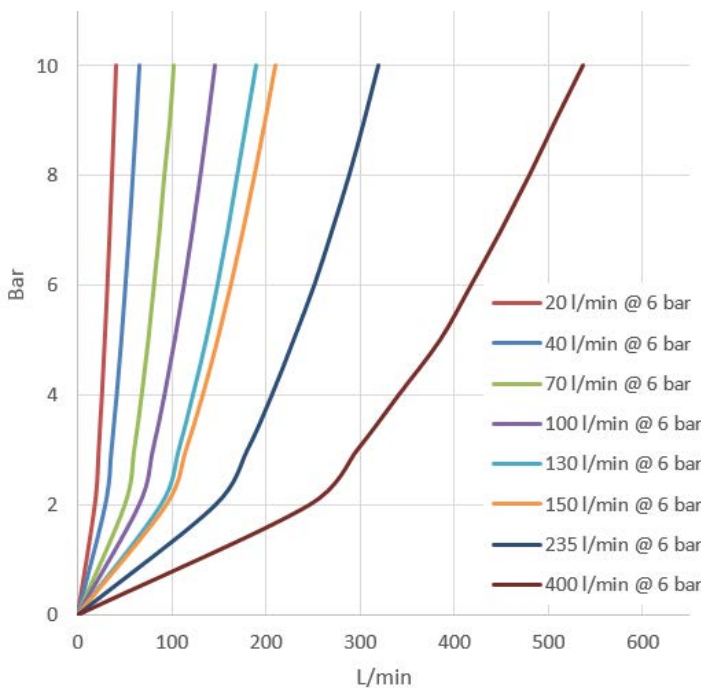

Options

- All coupling types
- Foam adapter
- Coloured (red, blue, yellow, green, orange) flow control handle and pistol covers (MultiFlow are delivered as standard with red covers)

Reduced cost of ownership

Very light maintenance requirement due to the nozzle design and materials used.

