

Aluminum
model



Fibertech
model

SELECTABLE FLOW NOZZLE

MultiFlow Regular

EN1518-2 certified selectable flow nozzle

- Body available in Hard anodized Aluminum / Fibertech Composite
- 6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction
- Adjustment of the full jet to the optimal spray angle in a quarter turn
- Stainless steel slide valve for keeping perfect stream quality
- Powerful full cone spray for smothering flames.
- Unbreakable teeth No Maintenance
- Polyurethane Bumper resistant to high temperatures, hydrocarbons and aggressive chemicals
- Strainer to prevent large debris and ingress.



Leader Nozzles are
available in 3
Different sizes:

Compact



Regular




Large



*FiberTech: THE NEW COMPOSITE MATERIAL FOR NOZZLES

- Far Lighter than brass
 - Lighter than aluminium but equal in terms of mechanical strength and durability.
 - Superior corrosion resistance compared to aluminium and brass:
 - In saline environments
 - In use with foam concentrates.
- Equal to aluminium alloy for resistance to chemicals

As part of our policy of constant research to improve our products, we reserve the right to modify our products characteristics at any time without notice.



Characteristics



Model "Regular"	Fibertech Body	Aluminium Body	Weights	Flowrates	Pressures	Inlets
MULTIFLOW 400	LMC-002-EI	LMA-002-EI	Aluminum = 2.4 kg / 5.3 lbs. Fibertech = 2.15 kg / 4.8 lbs.	70 – 130 – 235 - 400 lpm	6 bar	2" BSP M
	LMC-008-MI	LMA-008-MI				1.5" BSP F
	LMC-021-RI	LMA-021-RI				1.5" NH F
MULTIFLOW 500	LMC-001-MI	LMA-001-MI		100 – 250 – 350 -500 lpm	6 bar	1.5" BSP F
	LMC-007-RI	LMA-006-RI				1.5" NH F
MULTIFLOW 125G	LMC-003-TI	LMA-003-TI		30 - 60 – 95 – 125 GPM	100 PSI	1.5" NPSH F
MULTIFLOW 150G	LMC-004-RI	LMA-004-RI		60 – 95 – 125 – 150 GPM	100 PSI	1.5" NH F
	LMC-004-TI	LMA-004-TI				1.5" NPSH F

Dimensions

For 1.5" inlet versions: L. 30 x l. 13 x h. 25cm / L. 11.8" x l. 5.1" x h. 9.9"

For 2" inlet version: L. 31 x l. 13 x h. 25cm / L. 12.2" x l. 5.1" x h. 9.9"

CurveFlow vs Pressure

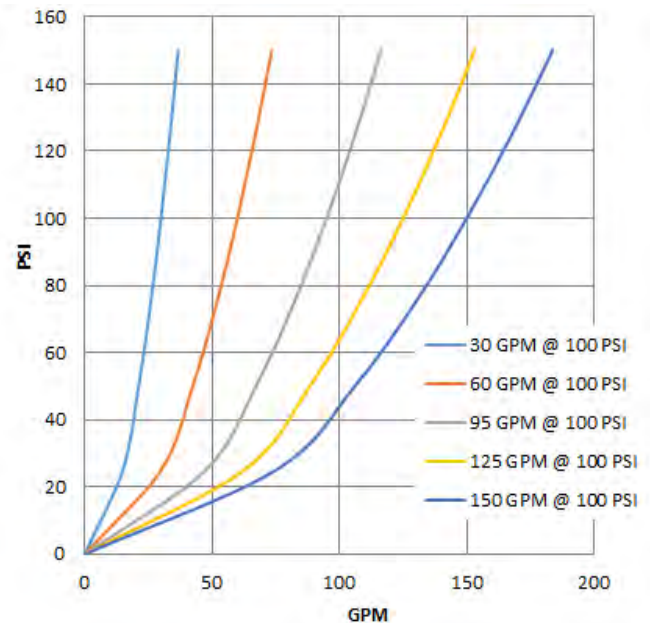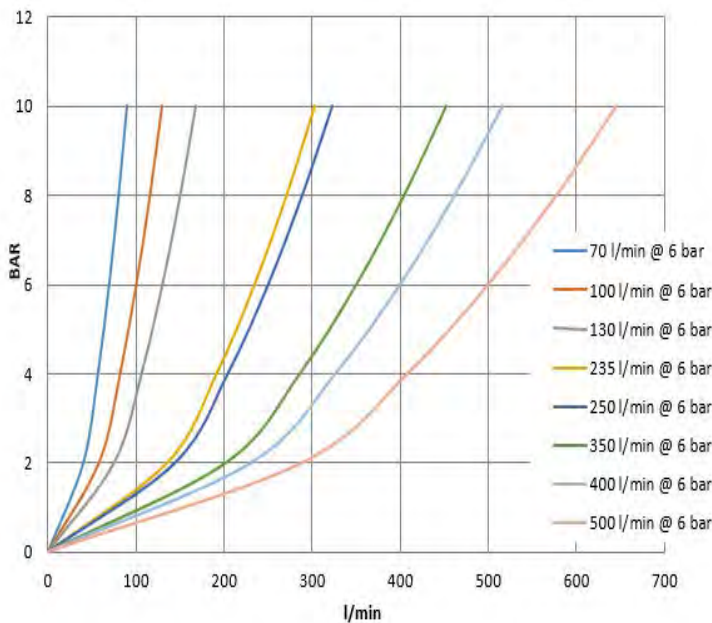

Options

All coupling types

Foam adapter

Coloured (red, blue, yellow, green, orange) flow control handle and pistol covers

(MultiFlow are delivered as standard with red covers)

Reduced cost of ownership

Very light maintenance requirement due to the nozzle design and materials used.



"Quality and Innovative Fire and Rescue Equipment"

www.bigredtruck.com.au
asktheteam@bigredtruck.com.au
 Phone: +61 (0)7 3287 5505